

MCCALLUM HIGH SCHOOL FINE ARTS ACADEMY STAGE PROJECT

STAKEHOLDER INFORMATION



- COVID has challenged us in ways we've never imagined
- We are re-thinking how we live, and engage within our community
- Imagine a space for High School and Fine Arts to extend classrooms outdoors
 - This space will outlast the pandemic
 - It will provide many uses for the school, fine arts and McCallum community

IMAGINE AN INNOVATIVE AND CREATIVE OUTDOOR SPACE



- Outdoor Classroom
 - MAC Clubs
- Awards Assemblies
 - Pep Rallies

IMAGINE AN INNOVATIVE AND CREATIVE OUTDOOR SPACE

Performances

- Theatre
- Dance



IMAGINE AN INNOVATIVE AND CREATIVE OUTDOOR SPACE



Student Showcase

- Art Exhibits

IMAGINE AN INNOVATIVE AND CREATIVE OUTDOOR SPACE

Musical Performance

- Orchestra
- Band
- Choir
- Piano
- Guitar



IMAGINE AN INNOVATIVE AND CREATIVE OUTDOOR SPACE

- Career Coaching
- Guest Speakers





4 VIEW FROM STREET




5 3D VIEW

FLOORS AND SLABS				
Count	Volume	Description	Cost	Unit
35	2.44 CY	3/4" PRESSURE TREATED PLYWOOD SHEATHING, 48x96 SHEETS, TYP.	\$43.00	Each
21	3.59 CY	12" DEEP FOOTING, REFERENCE PLAN.	\$100.00	Per CY
1	5.54 CY	REUSED SOIL INFILL	\$0.00	Existing


LUMBER AND WALL MATERIAL				
Count	Description	Cost	Unit	
17	2x6 PRESSURE TREATED SOUTHERN PINE NO.2, 48"	\$9.00	EACH	
70	2x10x10' PRESSURE TREATED SOUTHERN PINE NO.2 @ 16' O.C.	\$30.00	EACH	
46	2x12x8 PRESSURE TREATED SOUTHERN PINE NO.1	\$28.00	EACH	
4	2x12x10' PRESSURE TREATED SOUTHERN PINE NO.1	\$35.00	EACH	
3	2x12x12' PRESSURE TREATED SOUTHERN PINE NO.1	\$42.00	EACH	
177	4'x8'x12" LIMESTONE RETAINING WALL BLOCK	\$2.00	EACH	
4	4x4 PRESSURE TREATED POST	\$2.00	EACH	
21	6x6 PRESSURE TREATED POST	\$7.00	EACH	

RAILINGS				
Length	Description	Cost	Unit	
40' - 1 1/2"	1.5" PAINTED STEEL HANDRAIL	\$60.00	PER LF	


1. MATERIAL COSTS INCLUDE JOIST HANGERS AND ANCHOR BOLTS, BUT NOT FASTENINGS OF ANY SORT.
 2. COSTS INDICATED ARE BASED ON GENERIC HOME IMPROVEMENT STORE INVENTORY AND ARE MATERIAL COSTS ONLY. NO DELIVERY OR LABOR COSTS ARE INCLUDED AT ALL.
 3. TAKEOFFS DO NOT INCLUDE ANY REPAIR TO AREAS OUTSIDE THE IMMEDIATE AREA OF THE PLATFORM.

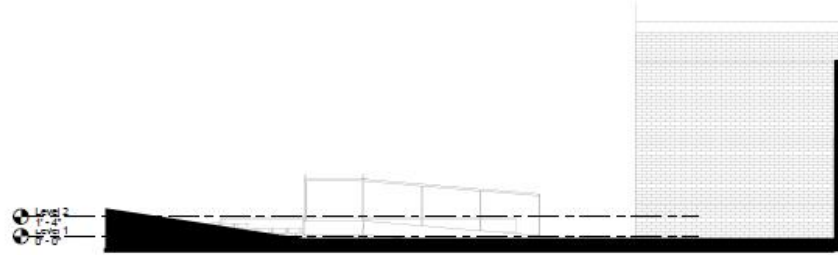

1 EXTERIOR ELEVATION A

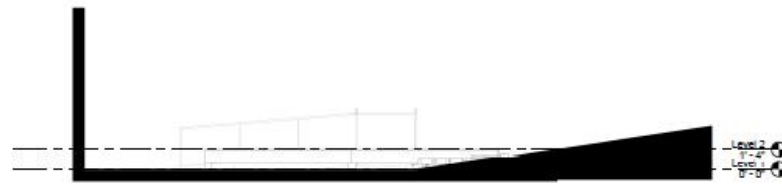

2 EXTERIOR ELEVATION B

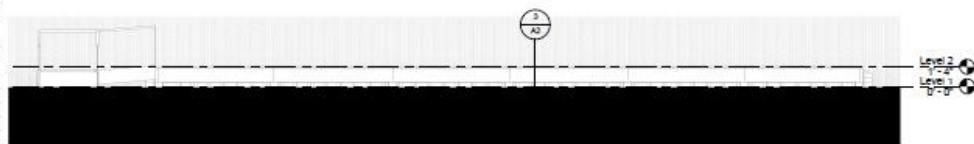

3 EXTERIOR ELEVATION C

PROPERTY OWNER CONTACT
 AISD / MCCALLUM HIGH SCHOOL
 5600 SUNSHINE DR
 AUSTIN, TX 78756
 NICOLE GRIFFITH, INTERIM PRINCIPAL
 NICOLE.GRIFFITH@AUSTINAISD.ORG

DESIGN
 SYMBIOTECH DESIGN LLC
 3909 MAPLEWOOD AVE, UNIT A
 AUSTIN, TX 78722
 WESLON BLANEY, LEEDAP BD+C
 WBLANEY@SYMBIOTECH-DESIGN.COM
 512-666-4745

STRUCTURAL REVIEW
 IMEG CORP.
 5113 SW PARKWAY, SUITE 295
 AUSTIN, TX 78735
 FRANCISCO CUEVAS, P.E.
 FRANCISCO.CUEVAS@IMEGcorp.com
 512-306-1669

NOT FOR CONSTRUCTION

No.	Revison	Description	Date

THEATRE PLATFORM
 MCCALLUM HIGH SCHOOL
EXTERIOR ELEVATIONS

Project number: 201101
 Date: 2020.11.13
 Drawn by: Author
 Checked by: Checker

A3.1

Scale: As Indicated